


PODIUM WITH INCLINED LADDER

PODIUM WITH INCLINED LADDER

The Ascend **PODIUM WITH INCLINED LADDER** allows us to access with the complete safety. Anti-slips steps and platform with the safer access methods to assemble and dismantle. The number of components in the Tower- Kit is sufficient for proper installation.

PLATFORM HEIGHT			1.3 MTR	1.5 MTR	2MTR
WORKING HEIGHT			3 MTR	4 MTR	5 MTR
PODIUM HEIGHT			2.3 MTR	2.5 MTR	3 MTR
COMPONENTS	CBM	UNIT WEIGHT			
PODIUM FRAME 210 CM HIGH WITH EASY GATE & SA STABILIZER	0.15	7.7	1	0	0
PODIUM FRAME 210 CM HIGH WITH 2 H & SA STABILIZER	0.15	8.9 KG	1	0	0
PODIUM 3 RUNGS AT LADDER & 2 H BRACE	0.25	5.3 KG	1	0	0
PODIUM DIAGONAL 98.7 CM LONG	0.0025	1.2 KG	1	1	0
PODIUM FRAME 230 CM HIGH WITH EASY GATE & SA STABILIZER ND FOR 2.5 M	0.17	8.4 KG	0	1	0
PODIUM FRAME 230 CM HIGH WITH 2 H & SA STABILIZER ND FOR 2.5 M	0.17	9.1 KG	0	1	0
PODIUM 4 RUNGS AT LADDER & 2 H BRACE FOR 2.5M WITH HANDRAIL	0.26	5.8 KG	0	1	0
PODIUM FRAME 178 CM HIGH WITH SPIGOT & DA STABILIZER ND FOR 3M	0.15	13.8	0	0	2
PODIUM GUARDRAIL 2.5 MM WITH EASY GATE ND FOR 3M	0.038	3.6	0	0	1
PODIUM GUARDRAIL 2.5 MM WITH 2 HORIZONTAL BRACE ND FOR 3M	0.038	5.3	0	0	1
PODIUM 6 RUNGS AT LADDER & 2 H BRACE FOR 3M WITH HANDRAIL	0.34	7	0	0	1
PODIUM DIAGONAL 113 CM LONG FOR 3M	0.0028	1.25	0	0	1
15 CM WHEEL WITH 17 CM FIXED JACK	0.01	16.36 KG	4	4	4
PODIUM STANDARD PLATFORM	0.046	4.6 KG	1	1	1
TOTAL WEIGHT (IN KGS)			44.06	45.46	51.91

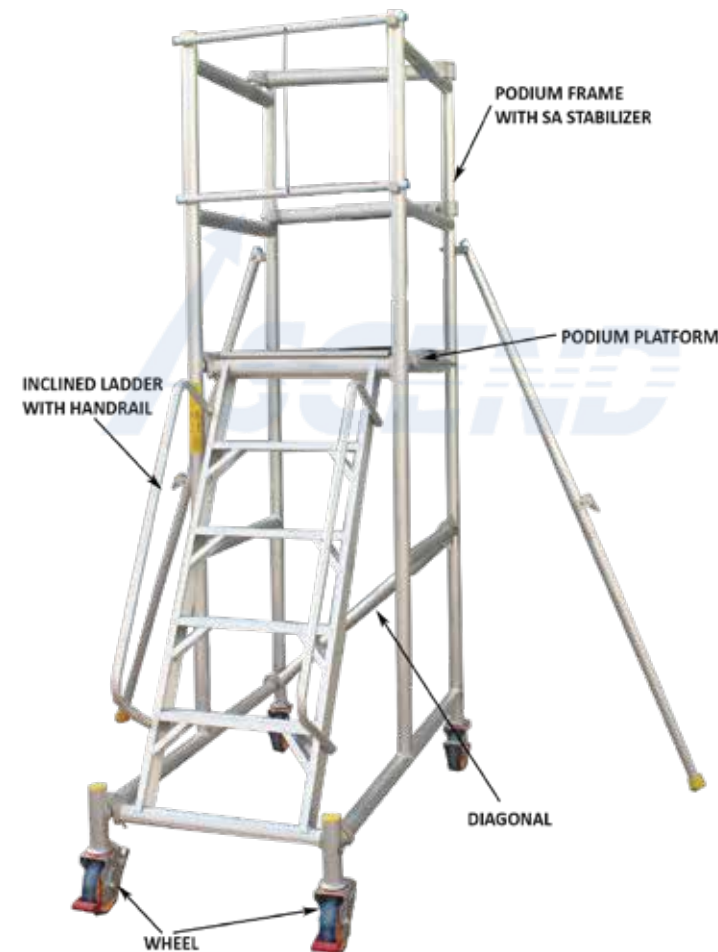

This work platform provides a fast, simple and cost effective solution for low level access. The modern alternative to step ladders.

Ideal for one man use . Position the platform allowing the correct guardrail height and start work. Easily portable and manoeuvrable, either open or closed, the unit passes easily through standard doorways.

- Lightweight and robust
- Provides a working platform **0.75m wide x 1.45m length**
- Optional platform levels 1.3mtr 1.5 mtr & 2 mtr
- Fitted with lockable castors
- Non slip platform boards
- Easily transportable
- Can be transported in a small van or standard elevator
- safety gate for added security



Low Level Training Available

ASCEND ACCESS SYSTEMS SCAFFOLDING L.L.C.

Tel : +971 4 885 5001
 Toll Free : 800 722 33653
 Email : sales@ascenduae.com
 Website : www.ascenduae.com

PODIUM WITH INCLINED LADDER

The law requires that the personnel erecting, dismantling or altering the PODIUM must be competent. Any person erecting Ascend PODIUM must have a copy of this guide.



STEP-1
Press Stop. Lock all Caster Wheel.
See Illustration 4



STEP-2
Fit diagonal to connect Podium Frame.



STEP-3
Fit inclined ladder On 3rd rung from top to the podium lower rungs. As per this picture



STEP-4
Fit platform on 3rd rung from the top



STEP-5
Press trigger of the stabilizer to expand the stabilizer
See Illustration 5



STEP-6
Close the easy gate.



STEP-7
Fit horizontal brace to form the complete guardrail.

MAINTENANCE RULES

Ensure that the PODIUM is kept clean.

Grease all moving parts with commercial oil. Wipe off excess oil.

Check frames and braces and boards for paint, grit, burrs etc. Remove any foreign substance with a light wire. If paint gets on the podium, it can be removed with turpentine.

Where brace and platform hooks attach the frames, ensure that the frame rungs are kept clean.

Ensure that all locking hooks function correctly. If necessary lubricate with light oil.

The inside diameter of all hooks should be kept clean to ensure they fit to other components without being forced.

If in any doubt about the proper use and maintenance of the podium, consult the manufacturer.

Do not misuse or abuse the podium with heavy objects, hammers etc. Do not throw components in and out of vehicles or to the ground when the podium is being dismantled. Such abuse may reduce the structural integrity of the podium. Under no circumstances damage or incorrect components shall be used, Either repair it or get replacement.


ILLUSTRATION




1) Brace lock - Sort the braces into horizontal and diagonal braces, the diagonal braces are slightly longer in size.



3) Windlock - A windlock clip is installed on the platform at the hook. This is locked as shown here.



2) Snap pins - Unlock the interlock Clips on all frames. When installed, always move the interlock clip to the "Locked" Position.



4) Wheel lock - Lock Castors before ascending podium.



5)

GENERAL SAFETY RULES

1. Ensure all components are present and not damaged before use.
2. Do not use on unstable ground such as loose bricks, boxes or blocks.
3. Remove all personnel and materials before moving the folding unit.
4. When moving the unit, apply force manually by pushing at the base.
5. Do not gain height by using boxes, ladders, on the platform.
6. Ensure all castors wheels are locked.
7. Do not overload the unit.
8. Do not overreach out of the unit.
9. Erect *Podium* on a firm level ground
10. Beware of horizontal forces (e.g. when using power tools) which could generate instability or overturning of the tower. Maximum horizontal force 20Kg.

**MAX SAFE
WORKING LOAD
PLATFORM 150 KG**

For more information on this product please contact us on:

Toll Free: 800 SCAFFOLD (800-72233653)
Email sales@ascenduae.com